

Crane Scale Load Cell

FEATURES

- Capacity: 1.5T to 30T
- Alloy steel construction
- Integrated overload protection for both tension and compression loading
- Direct mounting of weight indicator
- IP67 protection

APPLICATIONS

- Crane scales
- Hanging scales

DESCRIPTION

Model 91002 is an alloy steel shear beam load cell designed for crane scale and hanging scale applications. The load cell design features integrated overload protection for both tension and compression loading with a rated output of 1.5 mV/V.




Model 91002 is supplied with a Teflon cable which makes the load cell ideal for harsh environments. The design also allows for direct mounting of the weight indicator which is typical for crane scale applications.

OUTLINE DIMENSIONS in millimeters

CAPACITY	A	B	C	D	E	F	G	H	I	J	K	L THREAD
1.5, 3.0, 5.0 tons	29.7	69.5	289.0	238.6	50.0	50.0	49.0	130.0	110.0	19.0	10.0	M6 x 1.0, DEEP 12.0, 4 PLCS
7.5, 15.0 tons	37.0	120.0	399.5	295.5	73.8	90.0	100.0	199.5	100.0	36.0	18.0	M12 x 1.75 DEEP 12.0, 4 PLCS


1.5-15.0 tons

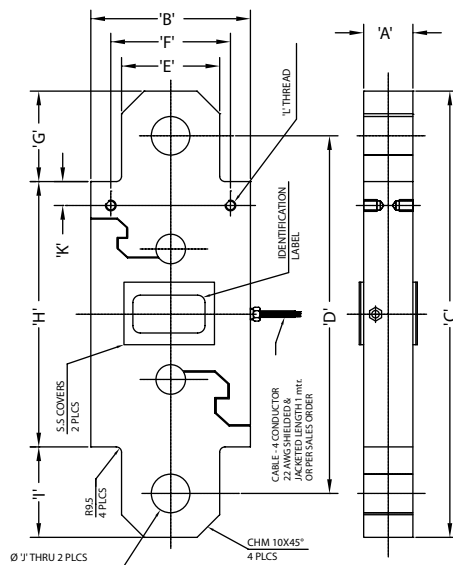

WIRING

RED EXC. +
BLACK EXC. -
GREEN OUTPUT +
WHITE OUTPUT -
SHIELD GROUND

30.0 tons

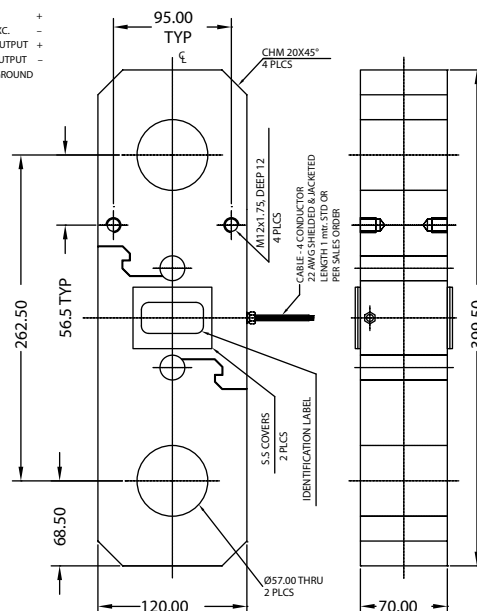

Crane Scale Load Cell

SPECIFICATIONS		
PARAMETER	VALUE	UNIT
Rated output—R.O.	1.5	mV/V
Rated output tolerance	5	±% FSO
Zero balance	1	±% FSO
Combined error	<0.050	±% FSO
Non-linearity	<0.030	±% FSO
Hysteresis	<0.020	±% FSO
Non-repeatability	<0.020	±% FSO
Creep error (30 minutes)	<0.020	±% FSO
Temperature effect on zero	<0.002	± %/°C
Temperature effect on output	0.001	± %/°C
Operating temperature range	-20 to +70	°C
Maximum safe central overload	150	% FSO
Ultimate central overload	300	% FSO
Excitation, recommended	10	VDC
Excitation, maximum	15	VDC
Input impedance	360-450	Ω
Output impedance	349-355	Ω
Insulation resistance at 50 VDC	>1000	MΩ
Material	Alloy steel with electroless nickel-plated	
Environmental protection	IP67	

All specifications subject to change without notice.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.